


MAX-FAN 355 - 2580

TECHNICAL DATASHEET

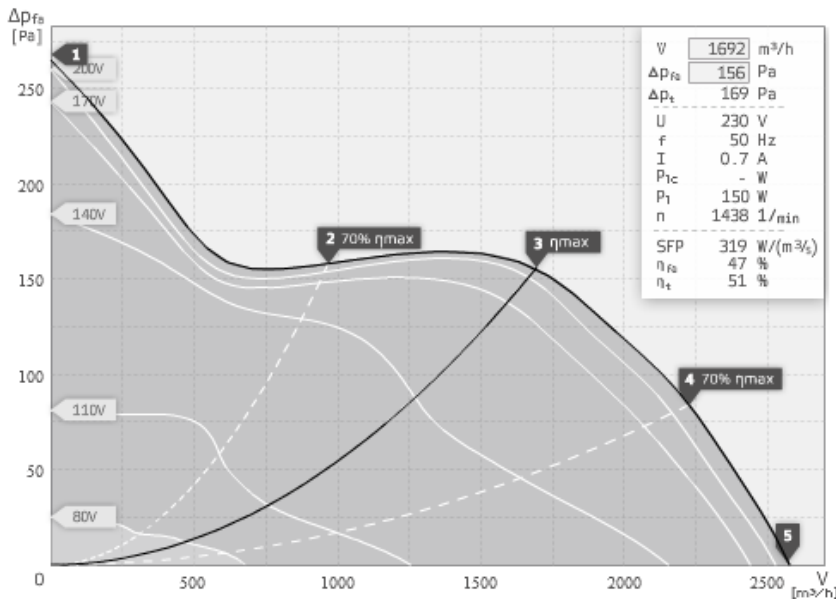

- Diagonal impeller with stator
- Galvanized metal housing
- Speed controllable
- Integrated thermal switch
- Including mounting bracket

Operating Point		1	2	3	4	5
Current I	A	0,6	0,6	0,7	0,7	0,6
Power Consumption P1	W	142	126	150	151	140
RPM n	1/min	1441	1455	1438	1437	1447
SPL inlet LWA5	dB(A)	72	68	64	66	69
SPL outlet LWA6	dB(A)	76	70	67	69	71
SPL casing break out LWA2	dB(A)	55	51	48	49	52

Sound power (LW) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	LWA5	64	-	44	55	58	60	57	55	44
Outlet	LWA6	67	-	53	56	62	63	57	53	40
Casing	LWA2	48	-	42	39	40	43	39	39	25

EL 355 E4 01 112369	
Voltage UN	230 V 1~
Current Imax	1
Ambient Temperature tA	80 °C
Medium Temperature tM	80 °C
Speed Control	V
Motor Protection	TMI
Isolation Class	F
Weight	13,5 kg

